



# MUR1510 THRU MUR1560

Efficient Fast Recovery Rectifier

## Features


- ★ Fast switching for high efficiency
- ★ Low forward voltage drop
- ★ High current capability
- ★ Low reverse leakage current
- ★ High surge current capability

## Mechanical Data

- ★ Case: Molded plastic, TO-220AC
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-202, method 208
- ★ Polarity: As marked
- ★ Mounting position: Any

Voltage Range 100 to 600 V  
Current 15 Ampere

### TO-220AC

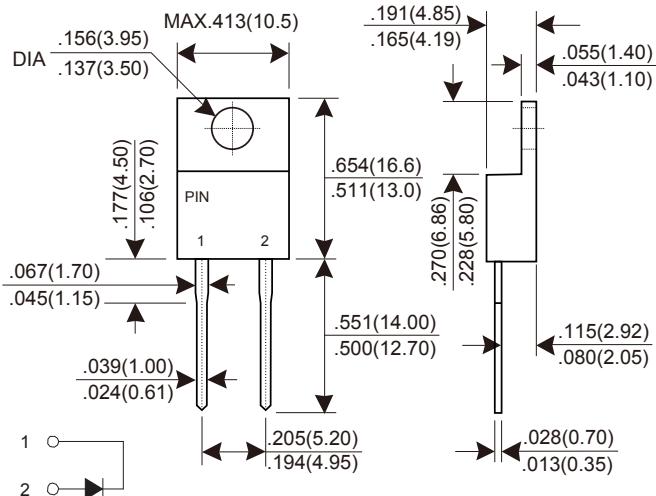

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	MUR1510	MUR1515	MUR1520	MUR1540	MUR1560	UNIT
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	100	150	200	400	600	V
Maximum RMS voltage	V <sub>RMS</sub>	70	105	140	280	420	V
Maximum DC blocking voltage	V <sub>DC</sub>	100	150	200	400	600	V
Maximum average forward rectified current @T <sub>L</sub> =125°C	I <sub>F(AV)</sub>				15		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>				150		A
Maximum instantaneous forward voltage @ I <sub>F</sub> =15A	V <sub>F</sub>		1.05		1.25	1.5	V
Maximum DC reverse current @T <sub>A</sub> =25°C at rated DC blocking voltage @T <sub>A</sub> =125°C	I <sub>R</sub>		5 200		10 500		µA
Maximum reverse recovery time (Note 1)	t <sub>rr</sub>		25		50		ns
Typical thermal resistance from junction to case	R <sub>θJC</sub>			1.5			°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>			-55 to +150			°C

NOTES : (1) Reverse recovery test conditions I<sub>F</sub> = 0.5A, I<sub>R</sub> = 1.0A, I<sub>rr</sub> = 0.25A.

# RATINGS AND CHARACTERISTICS CURVES MUR1510 THRU MUR1560

Fig.1 - Forward Current Derating Curve

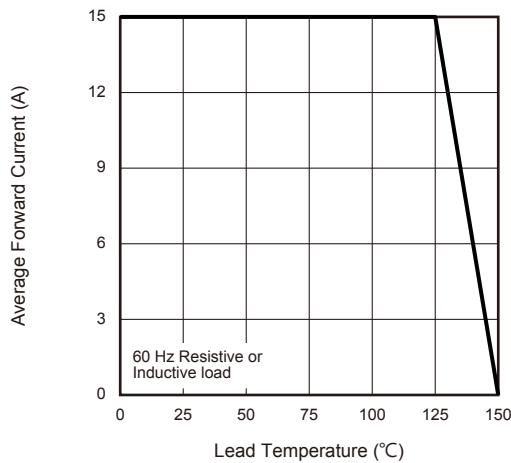


Fig.2 - Maximum Non-Repetitive Peak Forward Surge Current

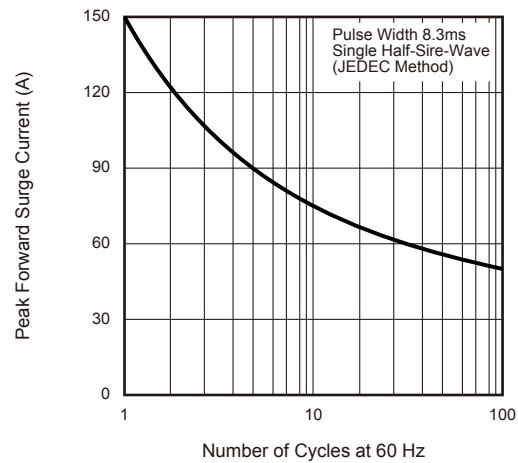


Fig.3 - Typical Instantaneous Forward Characteristics

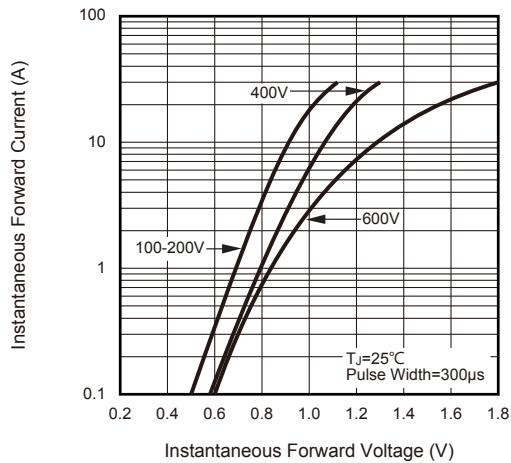


Fig.4 - Typical Reverse Leakage Characteristics

