



MUR810 THRU MUR860

Efficient Fast Recovery Rectifier

Features


- ★ Fast switching for high efficiency
- ★ Low forward voltage drop
- ★ High current capability
- ★ Low reverse leakage current
- ★ High surge current capability

Mechanical Data

- ★ Case: Molded plastic, TO-220AC
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-202, method 208
- ★ Polarity: As marked
- ★ Mounting position: Any

Voltage Range 100 to 600 V
Current 8.0 Ampere

TO-220AC

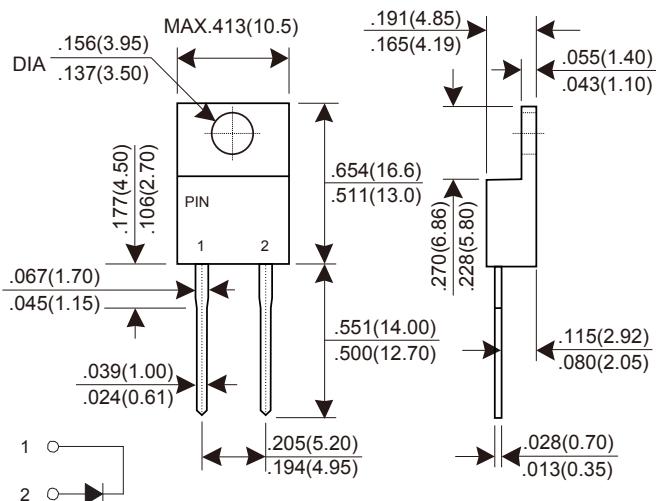

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	MUR810	MUR815	MUR820	MUR840	MUR860	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	100	150	200	400	600	V
Maximum RMS voltage	V _{RMS}	70	105	140	280	420	V
Maximum DC blocking voltage	V _{DC}	100	150	200	400	600	V
Maximum average forward rectified current @T _c =87.5°C	I _{F(AV)}				8.0		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}				125		A
Maximum instantaneous forward voltage @ I _F =8.0A	V _F			0.95	1.25	1.7	V
Maximum DC reverse current @T _A =25°C at rated DC blocking voltage @T _A =125°C	I _R			10 500			µA
Maximum reverse recovery time (Note 1)	t _{rr}		35		50		ns
Typical thermal resistance from junction to case	R _{θJC}			2			°C/W
Operating junction and storage temperature range	T _J , T _{STG}			-55 to +150			°C

NOTES : (1) Reverse recovery test conditions I_F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A.

RATINGS AND CHARACTERISTICS CURVES MUR810 THRU MUR860

Fig.1 - Forward Current Derating Curve

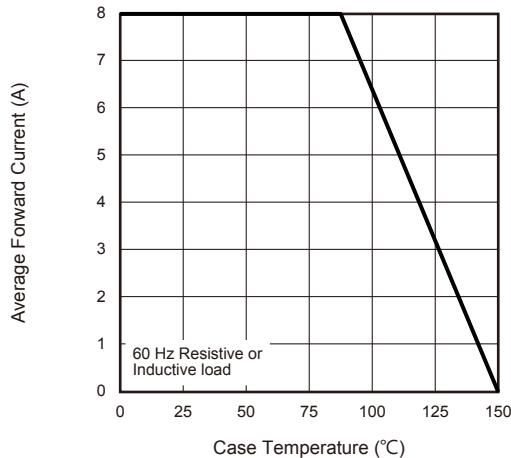


Fig.2 - Maximum Non-Repetitive Peak Forward Surge Current

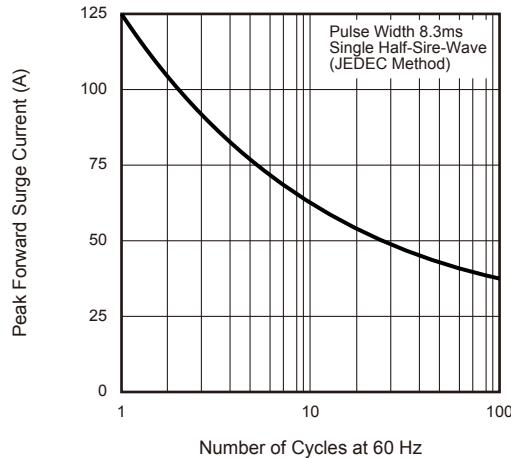


Fig.3 - Typical Instantaneous Forward Characteristics

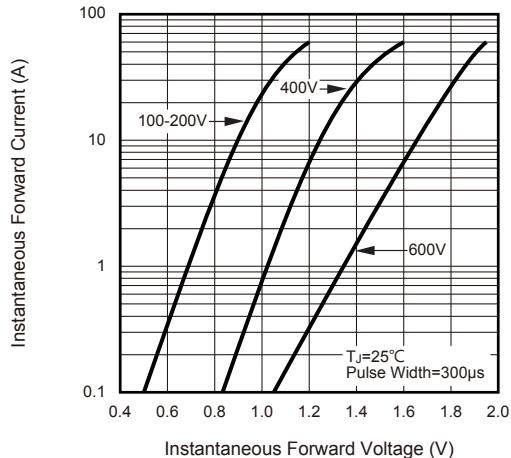


Fig.4 - Typical Reverse Leakage Characteristics

