



SS32A THRU SS3DA

Surface Mount Schottky Barrier Rectifier

Features


- ★ Low profile package
- ★ Ideal for automated placement
- ★ Guardring for overvoltage protection
- ★ Low power losses, high efficiency
- ★ Low forward voltage drop
- ★ High surge current capability

Mechanical Data

- ★ Case: Molded plastic, SMA/DO-214AC
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-750, method 2026
- ★ Polarity: Color band denotes cathode end
- ★ Mounting position: Any

**Voltage Range 20 to 200V
Current 3.0 Ampere**

SMA/DO-214AC

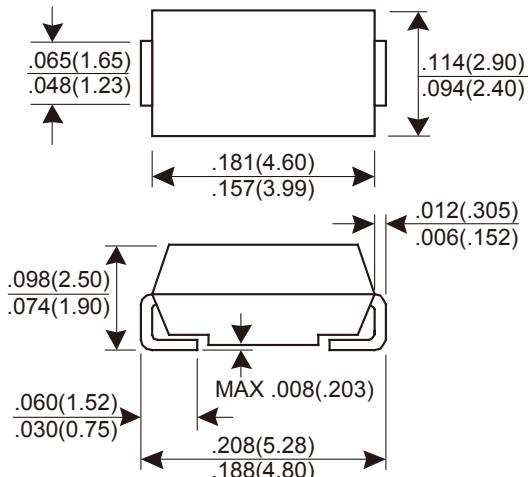

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	SS32A	SS33A	SS34A	SS35A	SS36A	SS38A	SS3BA	SS3CA	SS3DA	UNIT						
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	V						
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	V						
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	V						
Maximum average forward rectified current	I _{F(AV)}	3.0									A						
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	80									A						
Maximum instantaneous forward voltage @ I _F =3.0A	V _F	0.55		0.75		0.85		0.95		V							
Maximum DC reverse current @ T _A =25°C at rated DC blocking voltage @ T _A =100°C	I _R	0.5 10									mA						
Typical thermal resistance (Note 1)	R _{θJA}	66									°C/W						
	R _{θJL}	25									°C/W						
Operating junction temperature range	T _J	-55 to +125			-55 to +150			°C									
Storage temperature range	T _{STG}	-55 to +150									°C						

NOTE : (1) PCB mounted with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

RATINGS AND CHARACTERISTICS CURVES SS32A THRU SS3DA

Fig.1 - Forward Current Derating Curve

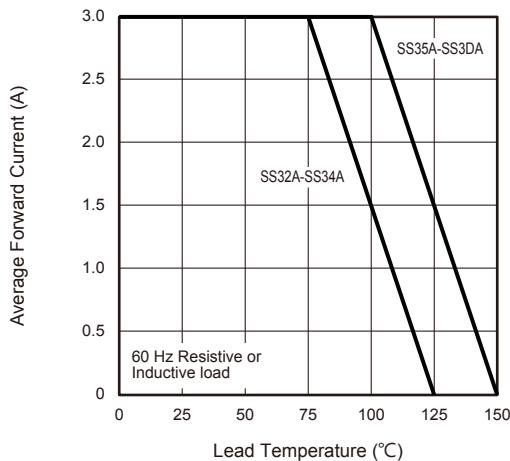


Fig.2 - Maximum Non-Repetitive Peak Forward Surge Current

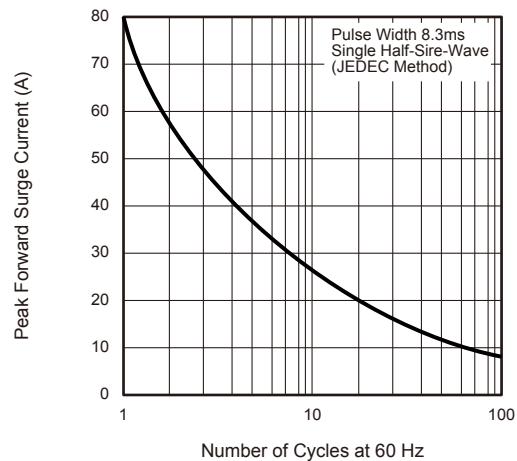


Fig.3 - Typical Instantaneous Forward Characteristics

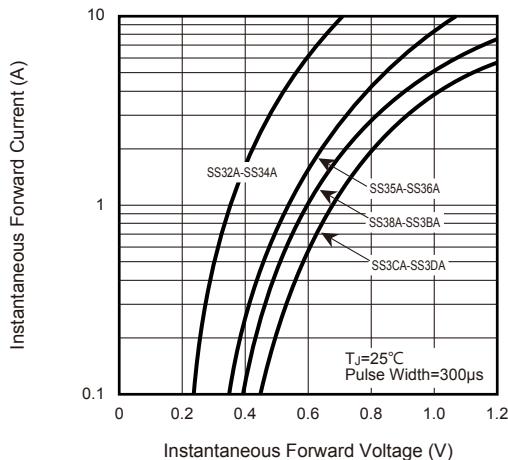


Fig.4 - Typical Reverse Leakage Characteristics

