


Features

- 50Watts peak pulse power ($T_P = 8/20\mu s$)
- DFN1006-2 package
- Bidirectional configurations
- Low clamping voltage
- Low leakage current
- Ultra Low capacitance ($C_j=0.35pF$ typ.)
- Protection one data/power line to:
 - IEC 61000-4-2 $\pm 15kV$ contact $\pm 20kV$ air
 - IEC 61000-4-4 (EFT) 40A (5/50ns)
 - IEC 61000-4-5 (Lightning) 3.5A (8/20 μs)

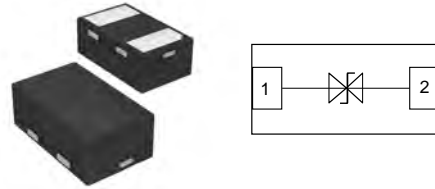

Mechanical Data

- **Case:** DFN1006-2 (plastic package).
Lead free; RoHS compliant; Halogen free
- **Molding Compound Flammability Rating:**
UL 94 V-0
- **Terminals:** High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- Cell Phone Handsets and Accessories
- Personal Digital Assistants (PDA's)
- Microprocessor based equipment
- Notebooks, Desktops, and Servers
- Portable Instrumentation

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified


| Parameter | Symbol | Value | Unit |
|---|-----------|-------------|------|
| Peak Pulse Power ($T_P=8/20\mu s$) | P_{PP} | 50 | W |
| ESD contact/air discharge (IEC-61000-4-2) | V_{ESD} | 15/20 | kV |
| Peak Pulse Current ($T_P = 8/20\mu s$) | I_{PP} | 3.5 | A |
| Junction Temperature | T_J | -55 to +125 | °C |
| Storage temperature | T_{STG} | -55 to +150 | °C |

Electrical Characteristics


($T_A = 25$ °C unless otherwise specified)

| Parameter | Symbol | Condition | Min | Typ | Max | Unit |
|----------------------------------|-----------|------------------------------|-----|------|-----|---------|
| Reverse stand-off Voltage | V_{RWM} | | | | 3.3 | V |
| Reverse Breakdown Voltage | V_{BR} | $I_T=1mA$ | 4.5 | | | V |
| Reverse Leakage Current | I_R | $V_R=3.3V, T=25$ C | | 0.1 | 0.5 | μA |
| Clamping Voltage (IEC 61000-4-5) | V_C | $I_{PP}=3.5A, T_P=8/20\mu s$ | | | 15 | V |
| Junction Capacitance | C_J | $V_R=0V, f=1MHz$ | | 0.35 | | pF |


Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

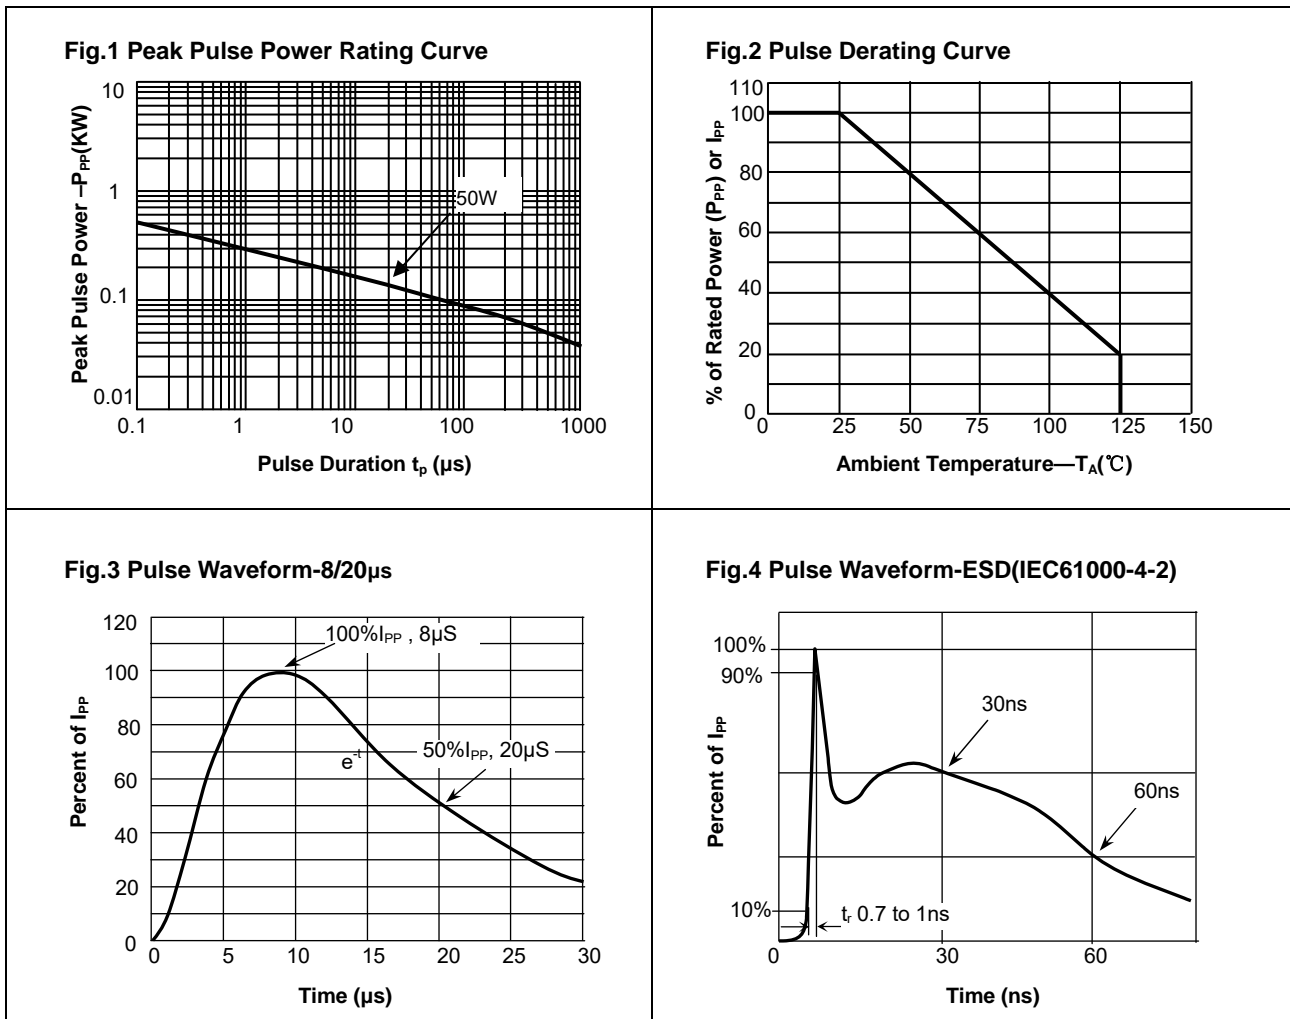


Package Dimensions

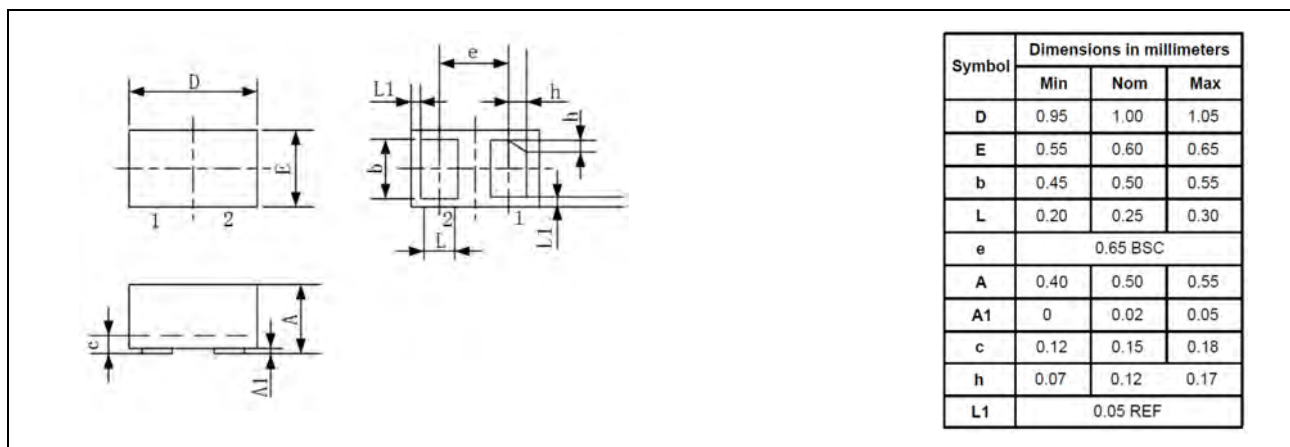

Pad Dimensions

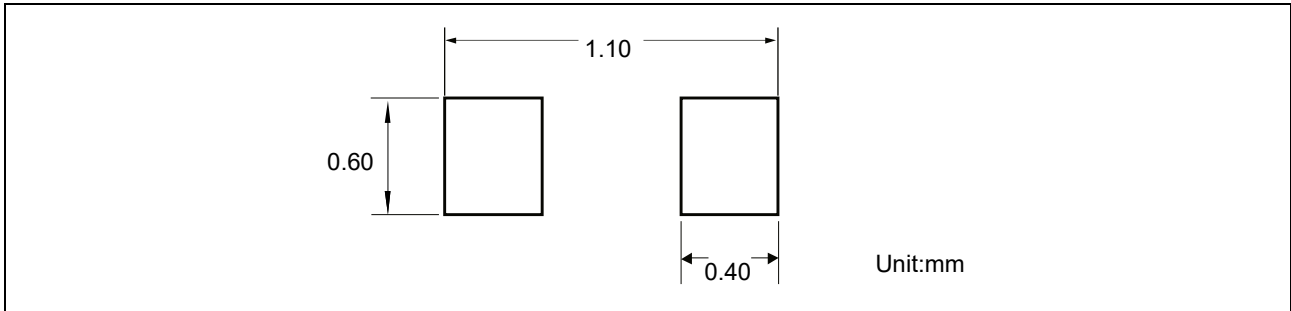

Tape and Reel Specification

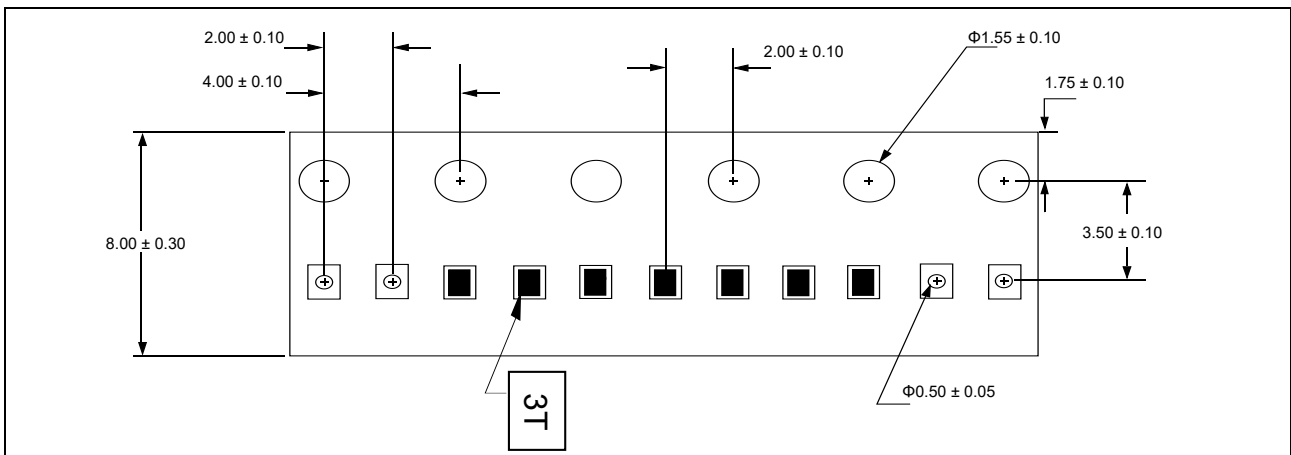

Marking



Ordering information

| Order code | Package | Packaging option | Base quantity | Packaging specification |
|---------------|-----------|------------------|-----------------|-------------------------|
| YEUD1023R3A5G | DFN1006-2 | Tape and reel | 10000pcs / reel | EIA STD RS-481 |