



GBJB1560


Low V_F Bridge Rectifiers

Features


- ★ Ideal for printed circuit boards
- ★ High surge current capability
- ★ Low forward voltage drop
- ★ Low reverse leakage current

Mechanical Data

- ★ Case: Molded plastic, GBJ
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-202, method 208
- ★ Polarity: As marked on body



**Voltage 600 Volt
Current 15 Ampere**

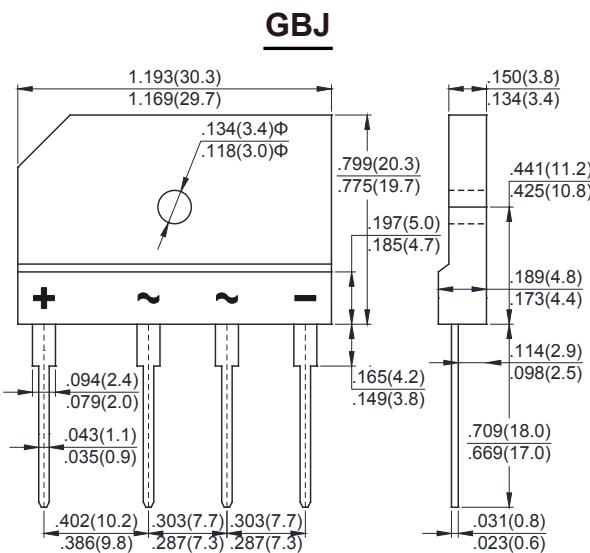

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	600	V
Maximum RMS voltage	V _{RMS}	420	V
Maximum DC blocking voltage	V _{DC}	600	V
Maximum average forward rectified output current @T _C =125°C	I _{F(AV)}	15	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	400	A
Rating for fusing (t < 8.3 ms)	I ² t	664	A ² s
Maximum instantaneous forward drop per diode @ I _F =7.5A	V _F	0.9	V
Typical instantaneous forward drop per diode @ I _F =7.5A	V _F	0.87	V
Maximum DC reverse current at @T _A =25°C rated DC blocking voltage per diode @T _A =125°C	I _R	10 250	µA
Typical junction capacitance (Note 1)	C _J	260	pF
Maximum thermal resistance junction to case	R _{θJC}	1	°C/W
Operating junction and storage temperature range	T _{J,TSTG}	-50 to +150	°C

NOTES : (1) Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

RATINGS AND CHARACTERISTICS CURVES GBJB1560

Fig.1 - Forward Current Derating Curve

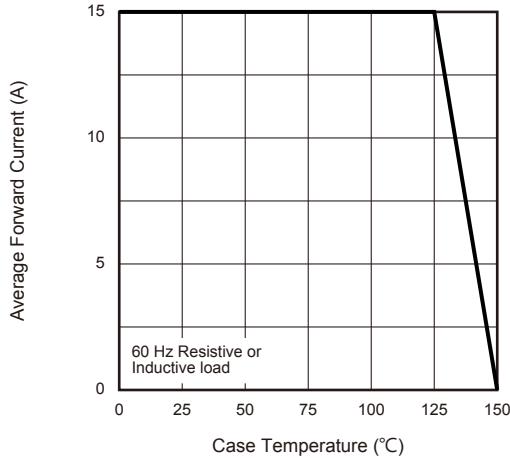


Fig.2 - Maximum Non-Repetitive Peak Forward Surge Current

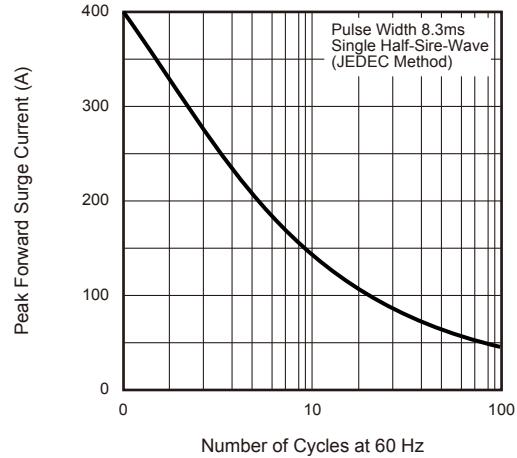


Fig.3 - Typical Instantaneous Forward Characteristics

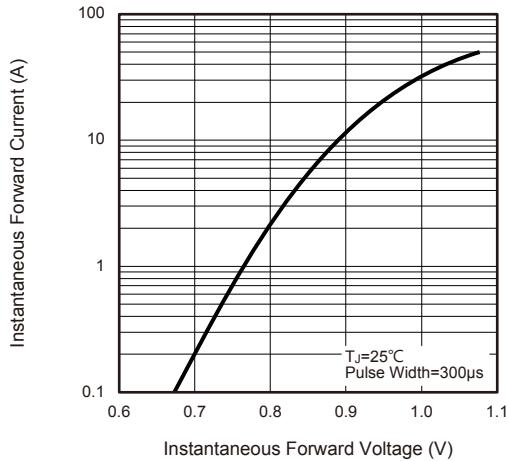


Fig.4 - Typical Reverse Leakage Characteristics

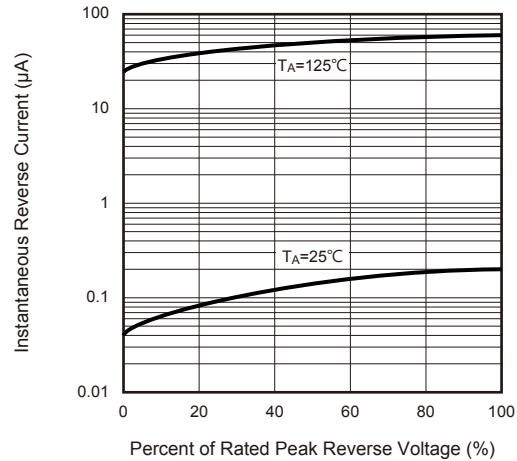


Fig.5 - Typical Junction Capacitance

