

10A TRIACs

Features


- Glass passivated chip junction
- High voltage and surge capability
- Low thermal resistance and durability
- Triggering in three quadrants
- Pb-free
- RoHS compliant

Applications

- Static relays
- Heating regulation
- Induction motor starting circuits
- Phase control operation in light dimmers
- Motor speed controllers

Main Features

Symbol	Value	Unit
$I_{T(RMS)}$	10	A
V_{DRM} / V_{RRM}	600 / 800	V

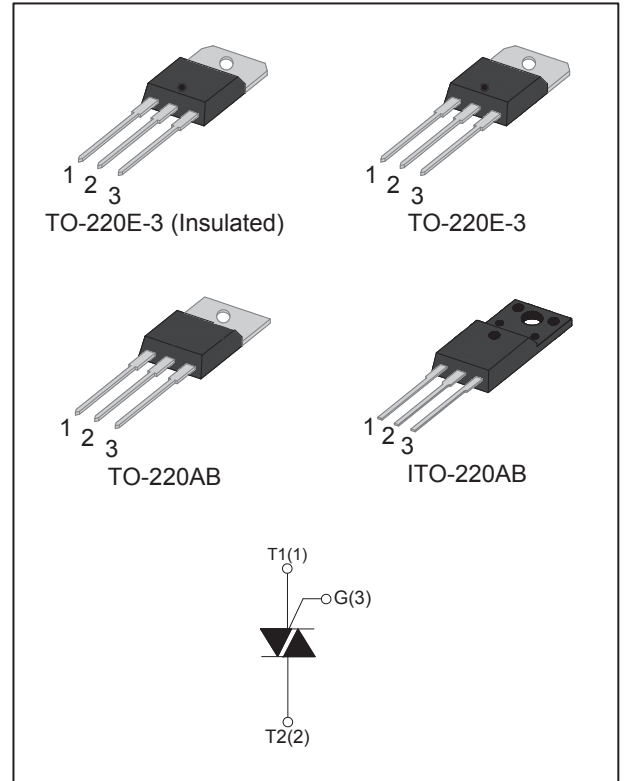

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{STG}	-40 to 150	°C
Operating junction temperature range	T_J	-40 to 150	°C
Repetitive peak off-state voltage ($T_J = 25^\circ\text{C}$)	V_{DRM}	600 / 800	V
Repetitive peak reverse voltage ($T_J = 25^\circ\text{C}$)	V_{RRM}	600 / 800	V
RMS on-state current	TO-220E-3(Ins) ($T_C=88^\circ\text{C}$)	10	A
	TO-220E-3 ($T_C=110^\circ\text{C}$)		
	TO-220AB ($T_C=110^\circ\text{C}$)		
	ITO-220AB ($T_C=97^\circ\text{C}$)		
Non repetitive surge peak on-state current (180° conduction angle, $F = 50\text{Hz}$, $t_P = 20\text{ms}$, full cycle)	I_{TSM}	100	A
I^2t value for fusing ($t_P = 10\text{ms}$)	I^2t	50	A^2s
Critical rate of rise of on-state current ($I_G = 2 \times I_{GT}$, $t_r \leq 100\text{ns}$)	dI/dt	50	$\text{A}/\mu\text{s}$
Peak gate current	I_{GM}	2	A
Average gate power dissipation	$P_{G(AV)}$	1	W

Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise specified) Logic Level & Snubberless (3 Quadrants)

Symbol	Test Condition	Quadrant		Value				Unit
I_{GT}	$V_D = 12\text{V}, R_L = 100\Omega$	I - II - III	MAX	5	10	35	50	mA
V_{GT}	$V_D = 12\text{V}, R_L = 100\Omega$	I - II - III	MAX	1.5				V
V_{GD}	$V_D = V_{DRM}, T_J = 125^\circ\text{C}$	I - II - III	MIN	0.2				V
I_L	$I_G = 1.2 \times I_{GT}$	I - III	MAX	20	25	50	70	mA
		II		25	35	90	100	
I_H	$V_{AK} = 12\text{V}, I_{GK} = 100\text{mA}$		MAX	15	20	40	60	mA
dV/dt	$V_D = 67\% V_{DRM}, \text{Gate open}, T_J = 125^\circ\text{C}$		MIN	50	200	500	1000	V/ μs

Static Characteristics

Symbol	Test Condition			Value	Unit
V_{TM}	$I_{TM} = 14\text{A}, t_p = 380\mu\text{s}$	$T_J = 25^\circ\text{C}$	MAX	1.55	V
I_{DRM} I_{RRM}	$V_D = V_{DRM}, V_R = V_{RRM}$	$T_J = 25^\circ\text{C}$	MAX	5	μA
		$T_J = 125^\circ\text{C}$		1	mA

Thermal Resistances

Symbol	Parameter		Value	Unit
$R_{\theta JC}$	Junction to case(AC)	TO-220E-3(Ins)	2.5	$^\circ\text{C/W}$
		TO-220E-3	1.6	
		TO-220AB	1.6	
		ITO-220AB	2.7	

Ordering Information

Ordering Type	Marking	Package	Quantity	Delivery Mode
T10xx-yyEI	T10xx-yyEI	TO-220E-3(Ins)	50	Tube
T10xx-yyE	T10xx-yyE	TO-220E-3	50	Tube
T10xx-yyT	T10xx-yyT	TO-220AB	50	Tube
T10xx-yyTF	T10xx-yyTF	ITO-220AB	50	Tube

Note : xx = sensitivity, yy = voltage

Ordering Information Scheme

T 10 05 - 600 T

Triac series

T = 3 Quadrants

$I_{T(RMS)}$

10 = 10A

I_{GT} Sensitivity

05 = 5/5/5mA

10 = 10/10/10mA

35 = 35/35/35mA

50 = 50/50/50mA

V_{DRM} / V_{RRM}

600 = 600V

800 = 800V

Package type

E = TO-220E-3

EI = TO-220E-3(Ins)

T = TO-220AB

TF = ITO-220AB

Ratings and Characteristics Curves

Fig.1 - RMS on-state current versus case temperature

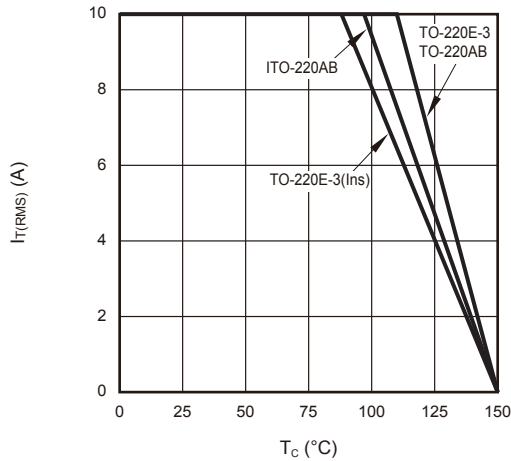


Fig.2 - Surge peak on-state current versus number of cycles

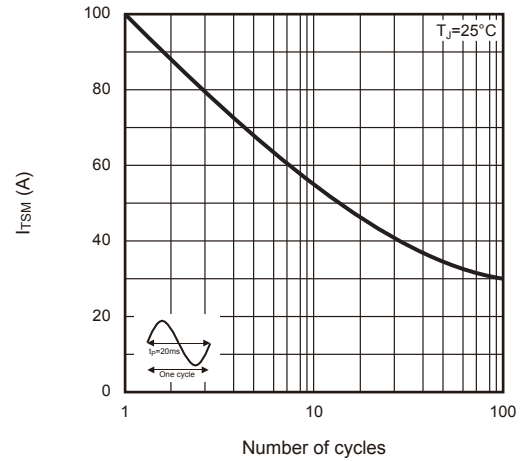


Fig.3 - On-state characteristics (maximum values)

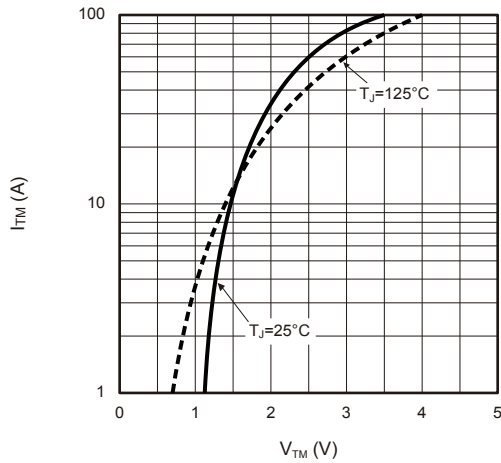


Fig.4 - Maximum power dissipation versus RMS on-state current



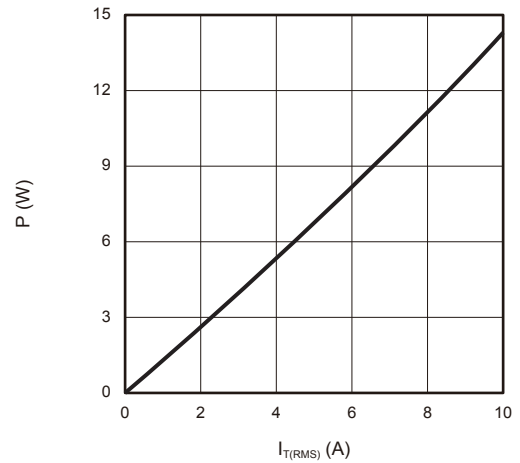


Fig.5 - Relative variations of gate trigger current, holding current and latching current versus junction temperature

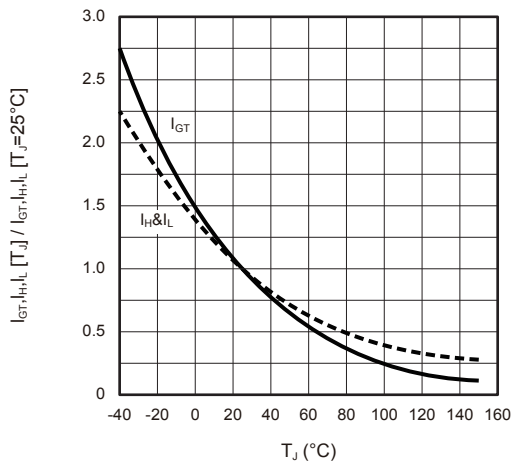


Package Outline Dimensions

TO-220E-3 / TO-220E-3(Ins)

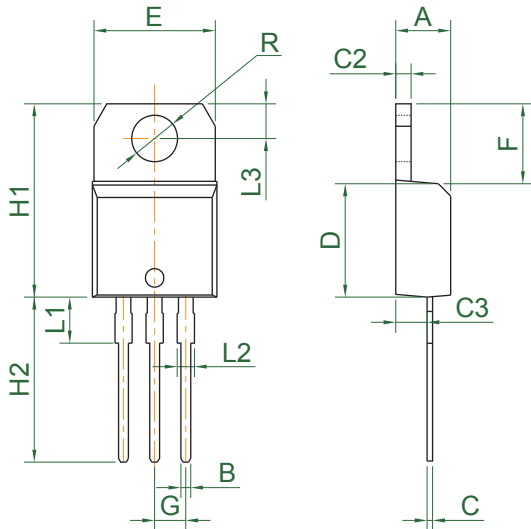

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.38	-	4.61	.172	-	.182
B	0.6	-	0.92	.024	-	.036
C	0.35	-	0.7	.014	-	.028
C2	1.15	-	1.36	.045	-	.054
C3	2.35	-	2.75	.092	-	.108
D	8.6	-	9.7	.339	-	.382
E	9.8	-	10.4	.386	-	.409
F	5.85	-	6.95	.230	-	.274
G	2.4	-	2.7	.094	-	.106
H1	14.8	-	16.1	.583	-	.634
H2	13.0	-	14.0	.512	-	.551
L1	2.8	-	4.2	.110	-	.165
L2	1.14	-	1.7	.045	-	.067
L3	2.65	-	3.1	.104	-	.122
R	3.7	-	3.95	.146	-	.156


TO-220AB

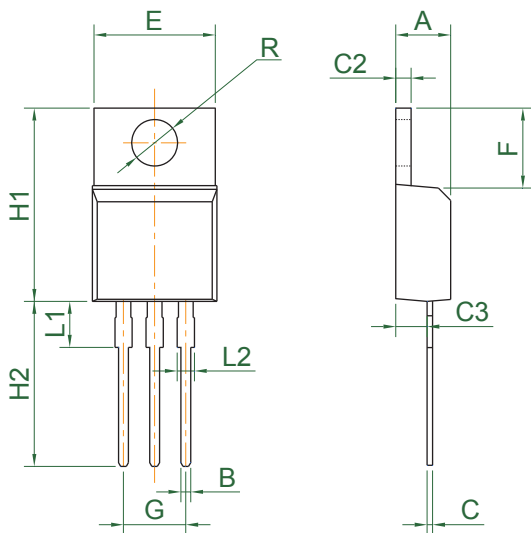

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.07	-	4.85	.160	-	.191
B	0.6	-	1.0	.024	-	.039
C	0.28	-	0.7	.011	-	.028
C2	1.1	-	1.5	.043	-	.059
C3	2.04	-	2.92	.080	-	.115
E	-	-	10.5	-	-	.413
F	5.8	-	6.93	.228	-	.273
G	4.84	-	5.32	.190	-	.209
H1	13.0	-	16.6	.512	-	.654
H2	12.7	-	14.2	.500	-	.559
L1	2.7	-	4.5	.106	-	.177
L2	1.1	-	1.7	.043	-	.067
R	3.4	-	3.95	.134	-	.156

Package Outline Dimensions

ITO-220AB

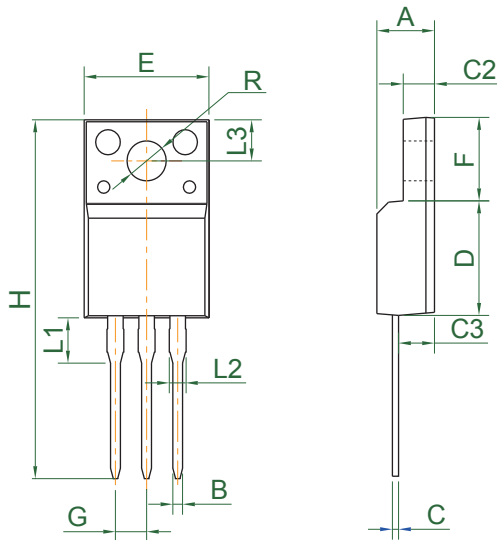

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.0	-	5.1	.157	-	.201
B	0.3	-	0.9	.012	-	.035
C	0.4	-	0.8	.016	-	.031
C2	2.34	-	3.3	.092	-	.130
C3	2.1	-	3.2	.083	-	.126
D	8.3	-	9.3	.327	-	.366
E	9.5	-	10.7	.374	-	.421
F	6.3	-	7.5	.248	-	.295
G	2.01	-	3.07	.079	-	.121
H	28.0	-	29.8	1.102	-	1.173
L1	2.5	-	4.3	.098	-	.169
L2	0.9	-	1.7	.035	-	.067
L3	2.5	-	3.6	.098	-	.142
R	2.7	-	4.31	.106	-	.170