



# UF151G THRU UF157G

Glass Passivated Ultra Fast Recovery Rectifier

## Features


- \* Fast switching for high efficiency
- \* Low forward voltage drop
- \* High current capability
- \* Low reverse leakage current
- \* High surge current capability

## Mechanical Data

- \* Case: Molded plastic, DO-15
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Terminals: Solderable per MIL-STD-202, method 208
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any

**Voltage Range 50 to 1000 V**  
**Current 1.5 Ampere**

### DO-15

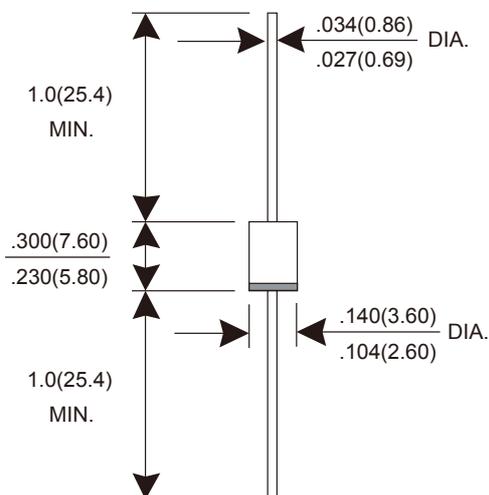

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	UF 151G	UF 152G	UF 153G	UF 154G	UF 155G	UF 156G	UF 157G	UNIT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V	
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V	
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V	
Maximum average forward rectified current @ $T_A=55^\circ\text{C}$	$I_{F(AV)}$	1.5							A	
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	50							A	
Maximum instantaneous forward voltage @ $I_F=1.5\text{A}$	$V_F$	1.0		1.3		1.7			V	
Maximum DC reverse current at rated DC blocking voltage @ $T_A=25^\circ\text{C}$ @ $T_A=125^\circ\text{C}$	$I_R$	1 150							$\mu\text{A}$	
Maximum reverse recovery time (Note 1)	$t_{rr}$	50				75				ns
Typical junction capacitance (Note 2)	$C_J$	50				35				pF
Typical thermal resistance from junction to ambient (Note 3)	$R_{\theta JA}$	55							$^\circ\text{C/W}$	
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$	

NOTES : (1) Reverse recovery test conditions  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{rr} = 0.25\text{A}$ .

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.

(3) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, PCB mounted.

# RATINGS AND CHARACTERISTICS CURVES UF151G THRU UF157G

Fig.1 - Forward Current Derating Curve

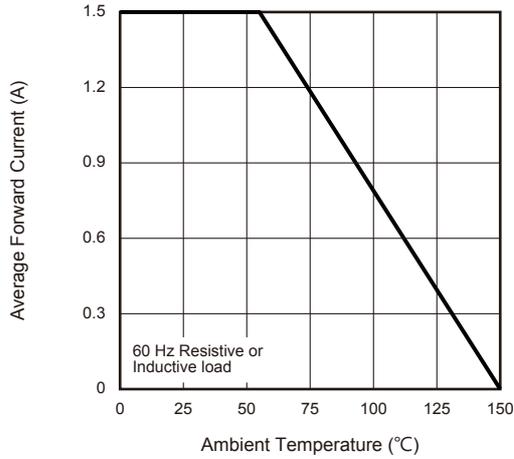


Fig.2 - Maximum Non-Repetitive Peak Forward Surge Current

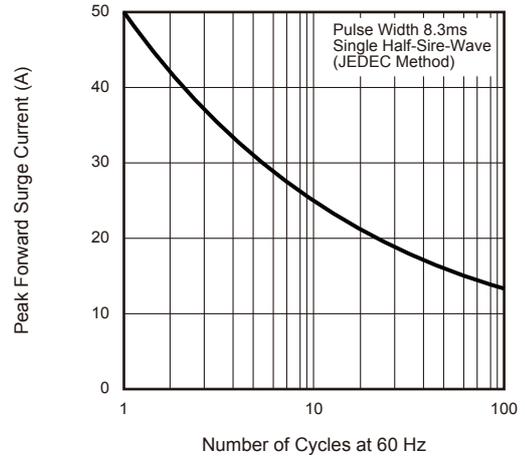


Fig.3 - Typical Instantaneous Forward Characteristics

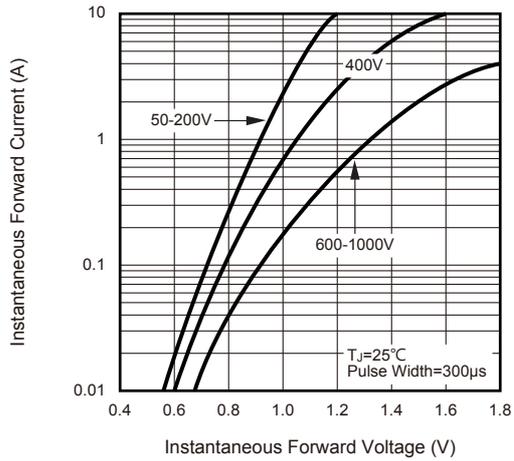


Fig.4 - Typical Reverse Leakage Characteristics

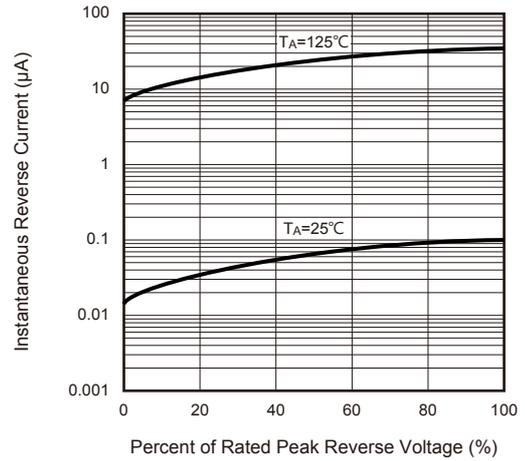


Fig.5 - Typical Junction Capacitance

