



US2A THRU US2M

Surface Mount Ultra Fast Recovery Rectifier

Features


- ★ Fast switching for high efficiency
- ★ Low forward voltage drop
- ★ High current capability
- ★ Low reverse leakage current
- ★ High surge current capability

Mechanical Data

- ★ Case: Molded plastic, SMB/DO-214AA
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-750, method 2026
- ★ Polarity: Color band denotes cathode end
- ★ Mounting position: Any

Voltage Range 50 to 1000 V
Current 2.0 Ampere

SMB/DO-214AA

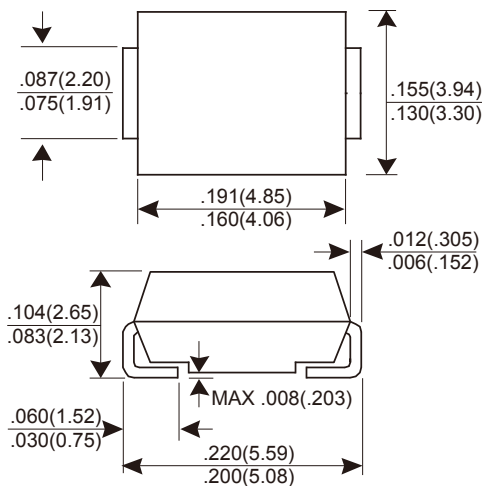

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	US2A	US2B	US2D	US2G	US2J	US2K	US2M	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current @ $T_L=110^\circ\text{C}$	$I_{F(AV)}$	2.0							A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	50							A
Maximum instantaneous forward voltage @ $I_F=2.0\text{A}$	V_F	1.0		1.3		1.7		V	
Maximum DC reverse current at rated DC blocking voltage @ $T_A=25^\circ\text{C}$ @ $T_A=100^\circ\text{C}$	I_R	1 100							μA
Maximum reverse recovery time (Note 1)	t_{rr}	50				75			ns
Typical thermal resistance from junction to ambient (Note 2)	$R_{\theta JA}$	80							$^\circ\text{C/W}$
Typical thermal resistance from junction to lead (Note 2)	$R_{\theta JL}$	20							$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150							$^\circ\text{C}$

NOTES : (1) Reverse recovery test conditions $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$.

(2) Mounted on PCB with 0.27" x 0.27" (7.0 mm x 7.0 mm) copper pad areas.

RATINGS AND CHARACTERISTICS CURVES US2A THRU US2M

Fig.1 - Forward Current Derating Curve

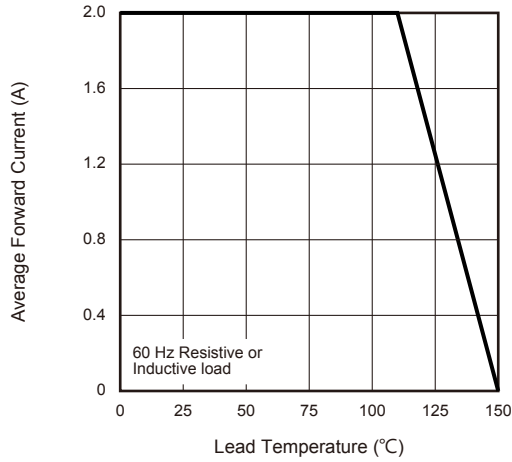


Fig.2 - Maximum Non-Repetitive Peak Forward Surge Current

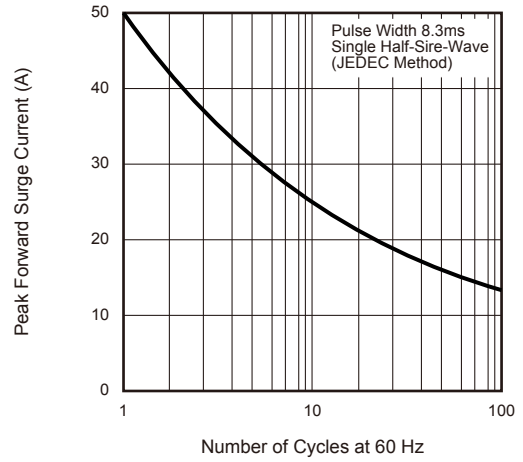


Fig.3 - Typical Instantaneous Forward Characteristics

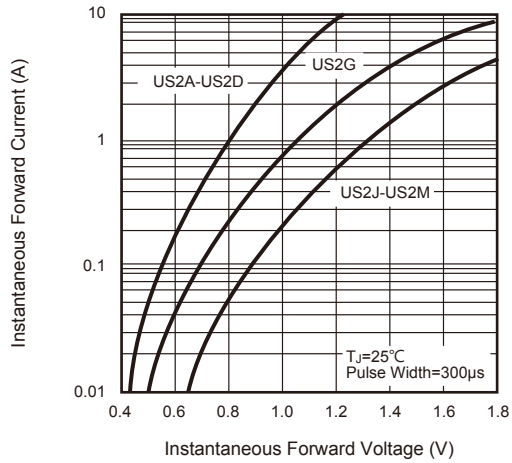


Fig.4 - Typical Reverse Leakage Characteristics

